




ASSEMBLING INSTRUCTIONS

- Users must stack the leveling blocks correctly because failure to do so could result in serious injury or death.
- The following are the recommended configuration to level your vehicle.


PYRAMID RAMP

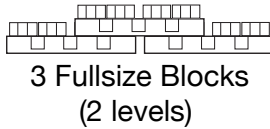


4 Halfsize Blocks
Placed Perpendicular

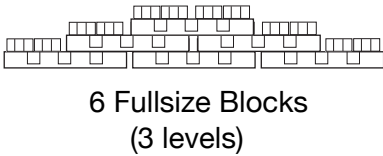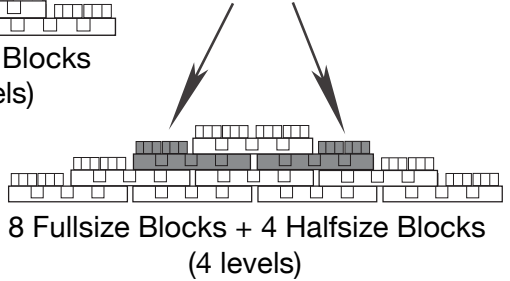


LEVELING RAMP



4 Fullsize + 1 Halfsize Blocks
(2 Levels)




7 Fullsize + 1 Halfsize Blocks
(3 Levels)




8 Fullsize + 2 Halfsize Blocks
(4 Levels)

RAMP STOPPER

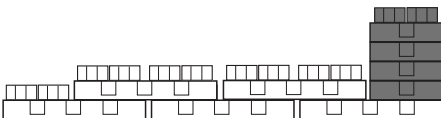

5 Fullsize + 4 Halfsize

CHOCK INTERLOCKS WITH LEVELING RAMP

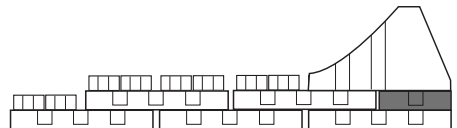

5 Fullsize + 1 Halfsize + Jumbo Wheel Chock
(Chock sold separately)

- The halfsize blocks are highlighted in grey color.



USER INSTRUCTIONS

STEP 1:

- Find a site that is flat and will provide a good base to set your leveling blocks.
- Turn off the engine and set the parking brakes.

STEP 2:

- Identify the wheel that needs to be leveled.
- Remove potential rocks and other debris that would prevent the leveling blocks from having a flat surface to rest on.
- Assemble the leveling blocks to the desired height, then, place the assemble leveling blocks in either the front or the back of the wheels depending on your desired configuration.

(See diagrams for acceptable configuration for leveling blocks).

STEP 3:

- Turn on engine and release the parking brake.
- Proceed slowly to position your RV onto the top of the leveling blocks.
---> If the leveling is not achieved, slowly move your RV off the leveling blocks, then turn off engine, set your brakes and repeat from Step 2
- Once the leveling is achieved, set the parking brake and turn off engine.


STEP 4: (Leaving from location)

- Turn on engine and slowly move off from the leveling blocks.
- Once off the blocks, set the parking brake and turn off the engine.
- Carefully remove all the leveling blocks from the ground.




CAUTION FOR HALFSIZE LEVELING BLOCKS


When using halfsize leveling blocks in place of a fullsize block, the halfsize blocks should be placed perpendicular with the gap line to form a stronger interlock with the other blocks.

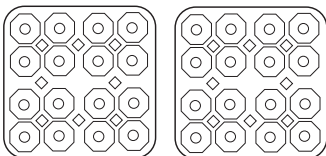


GAP LINE

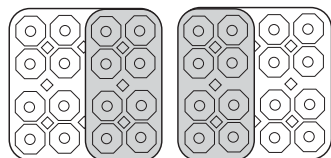

NO

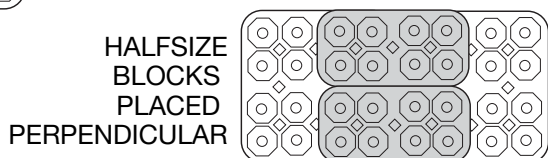

YES



SAFETY & WARNING INSTRUCTIONS

- Read and understand all instructions carefully before use.
- If leveling blocks are to be used under jacks or stabilizers, it is recommended that at least two leveling blocks be stacked under the jack or stabilizers. Make sure the ground is level and solid and do not manually handle the leveling blocks under the jacks or stabilizers while the jacks or stabilizers are positioning.
- For tandem wheel, it is recommended that only pyramid ramps be used for both wheels.
- This leveling blocks is not recommended to be used with tongue jacks.

CAUTION!

- Never go underneath vehicle when leveling blocks are in use.
- Only use the leveling blocks on level and solid surface.
- Leveling blocks should be clean and free of any oil or grease.
- Always confirm that people are clear of the vehicle when positioning the vehicle on to the leveling blocks.
- It is not recommended to stack the leveling blocks higher than 4 blocks.
- Do not use leveling blocks to replace the use of parking brake or other safety devices.
- Use extreme caution when driving on the leveling blocks. Failure to use caution could result in injury or death.
- Remember to always set your parking brake when using the leveling blocks.
- Always interlock your leveling blocks as you stack them together.
- Do not handle the blocks while the vehicle is driving onto the blocks.
- Always use the leveling blocks right side up.

KEEP SAFE DISTANCE FROM THE LEVELING BLOCKS
WHEN VEHICLE IS IN MOTION.



WARRANTY 3 YEARS

All Level-Trek products are warranted against defective material or workmanship for three years beginning from the original purchase date. The original warranty card must be returned to Level-Trek within 30 days of purchase for the warranty to be in effect. This warranty is not transferable. Level-Trek products that fail to operate properly or break under normal usage will be replaced.

Customer is required to send the damaged Level-Trek product to Level-Trek in order to initiate the claim.

What is not covered under the warranty:

The warranty does not cover improper use and intentional damage to the product.

What voids the warranty:

Failure to follow the instructions, misuse or abuse in the use and handling of the product will void this warranty.

Extent of warranty:

Any defective Level-Trek products properly returned to Level-Trek will be replaced. Level-Trek will not be responsible for any other expenses incurred by the customer under the terms of this warranty, nor shall it be responsible for any damages either consequential, special, contingent, or otherwise; or expenses or injury arising directly or indirectly from the use of Level-Trek Products. Any Level-Trek products returned to Level-Trek must be sent at customer's expense. Level-Trek reserves the right to determine whether the terms of the warranty, set out above had been properly complied with. In the event that the terms are not complied with, Level-Trek shall be under no obligation to honor this warranty.

Return the following warranty registration to:

Level-Trek, P.O. Box 68, San Gabriel, CA 91778-0068.

Any questions regarding Level-Trek Products, please email info@level-trek.com or call 626-689-4829.